


Assembly Instructions - Tablet Lift for the iPad® 2

Tablet Holder




to insert spigot

screen tilt
tension adjustment

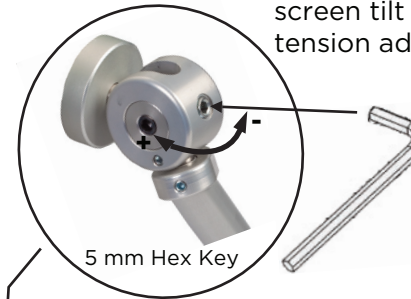

5 mm Hex Key

Head

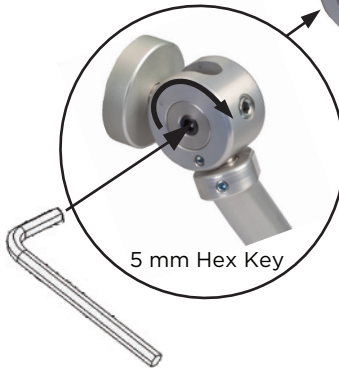

5 mm Hex Key

Tools Required:

- 5 mm Hex Key (supplied)
- 8 mm Hex Key (supplied)
- Torx Driver (supplied)
- 19 mm wrench (through desk)
(customer supplied)

Instructions:


1. Use either the edge clamp or the through desk mount to attach the arm to the surface.
2. Insert the Tablet holder into the Head.
3. Insert the iPad into the Holder.

Depending on the security required, choose between the supplied thumb screws (for easy removal) or the Torx driver and security screws (please do not over-tighten).

Mounting Options



small edge clamp



through desk (19 mm wrench)

Monitors 
in Motion